

CMI211-250-956F-L

Mini-ITX Standard System

Expandable Type system for IBASE MI956F Mini-ITX Motherboard



Features

- Mini-ITX system supports IBASE MI956 Mini-ITX motherboard
- Intel® Core™ i7/i5/i3 QC/DC mobile processors
- Supports 3x RS232 & 1x RS232/422/485
- 4x USB 2.0 ports/ 2x USB 3.0 ports
- Expansion PCI-E(x16) slot
- Supports 1x 2.5" SATA HDD drive bay
- Wall mount kit included


Specifications

System Mainboard	MI956F
CPU Type	Intel® Core™ i7/i5/i3 QC/DC mobile processors
System Speed	2.2GHz
Memory	2x 2GB DDR3-1333 SO-DIMM, Max. 16GB
Construction	SECC
Chassis Color	Black
Front Panel External I/O	N/A
Rear Panel External I/O	2x COM (Serial Ports) 1x DVI-I, 1x DVI-D 4x USB 2.0 2x USB 3.0 1x HDMI 2x RJ45 (Gigabit LAN) 1x Audio Jack (Line out, Line in, Mic in) 1x slot for PCI-E card 1x AC power-inlet 1x Power On/Off rock switch 1x PWR/HDD LED
Storage	1x 2.5" HDD/SSD bracket
Power Supply	250W ATX power Input voltage :100V ~ 240V Input frequency :50Hz ~ 60Hz
Mounting	Desktop or wall mount (wall mount kit included)
Dimensions	300mm(W) x 225mm(D) x 72mm(H) 11.81" (W) x 8.86" (D) x 2.83" (H)
Operating Temperature	0°C ~ 45°C (32°F ~ 113°F)
Storage Temperature	-20°C ~ 80°C (-4°F ~ 176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	CFD: 5 grms / 5~500Hz / random operation HDD: 1g / 5~500Hz / random operation
Certification	CE, FCC

Ordering Information

CMI211-250-956F-L	Chassis with MI956F Mini-ITX, 2.5" 320GB SATA HDD, 4GB DDR3 memory, 250W ATX power supply
CMI211-250-956F-LM	Chassis with MI956F Mini-ITX, without CPU, Memory, HDD

Dimensions and Drawing

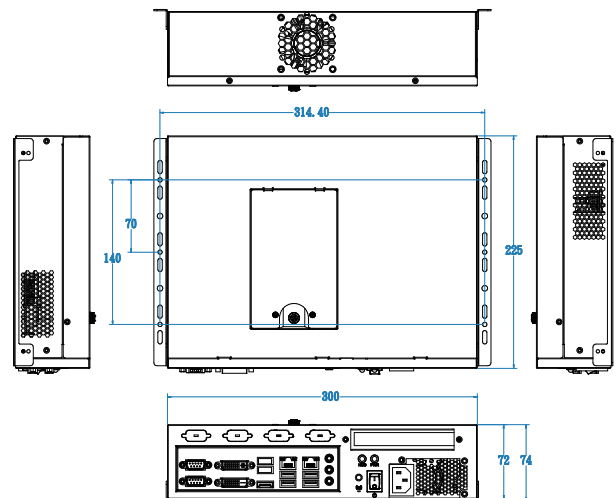

01 Embedded Systems
02 CPU Modules
03 Motherboards
04 Disk-Size SBCs
05 CPU Cards